



AIR CONDITIONING



REFRIGERATION



HEATING



mini orange[®]

CONDENSATE REMOVAL PUMP



The world's best selling mini pump offers unrivalled reliability and performance.



12L/h max. flow



10m max. rec. head (flow rate 6L/h)



21dB(A)

KEY FEATURES



- Submersible secondary reservoir included
- Plug & play
- Anti siphon device

SUITABILITY

- Up to 16kW / 54,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** Smaller commercial & domestic units



0.25[†] kg

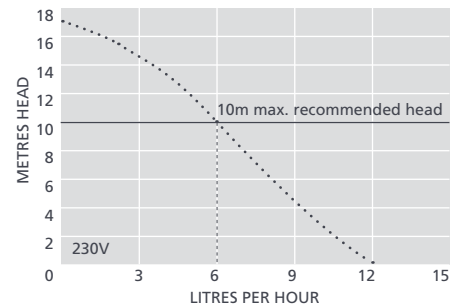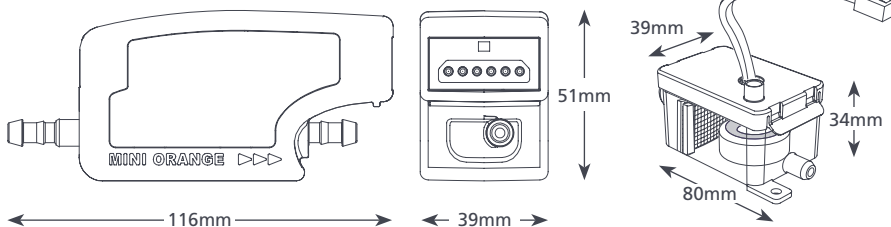

MINI ORANGE SPECIFICATIONS

Max. flow	12L/h @ 0 head
Max. rec. head	10m
Max. suction lift	2m
Sound level@1m	21dB(A)
Power supply	230V AC 50-60Hz 0.1A*
Rated	Non continuous
Class	II appliance <input type="checkbox"/>
Max. unit output	16kW / 54,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IPX1
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

MINI ORANGE OPTIONS

Mini Orange	FP2212
-------------	--------

* Other voltages available
† Pump only

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100
Mini Orange Extension Kit	FP2940

Xtra For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

- Mini Orange pump
- 1.5m Plug & play power cable
- Reservoir
- Reservoir lid with 1.5m sensor cable
- Submersible reservoir
- Anti siphon device
- Float & filter
- 1.5m Suction tube 6mm ID
- 220mm Orange inlet hose 14mm ID
- 150mm Vinyl breather tube 6mm ID
- Drain connector kit
- Fixing kit
- Install manual

- 📖 Download manual at aspenpumps.com
- ▶ View install video at aspenpumps.com



aspenpumps.com

☎ +44 (0)1323 848842

✉ sales@aspenpumps.com

Making life easier for the installer